


ARE COMMONLY USED TO SECURE U-CHANNEL TO FRAMING MEMBERS FOR LATERAL BRIDGING AND FOR MISCELLANEOUS RIGID CONNECTIONS.

This high-performance, multi-use utility clip is ideal for corner reinforcements, stair openings, and numerous support applications.


EasyClip™ S-Series™ support clips are commonly used for rigid connections in window and door framing, joist, bypass or other miscellaneous connections to secure one framing member to another, or to secure framing members to the structural frame.

Available in a variety of lengths and gauges, EasyClip S-Series clips are prepunched for faster and more accurate fastener placement.

- 1-1/2" x 1-1/2" legs.
- Lengths available in 3", 5", 7", 9" and 11".
- Available in 16, 14, and 12 gauge.

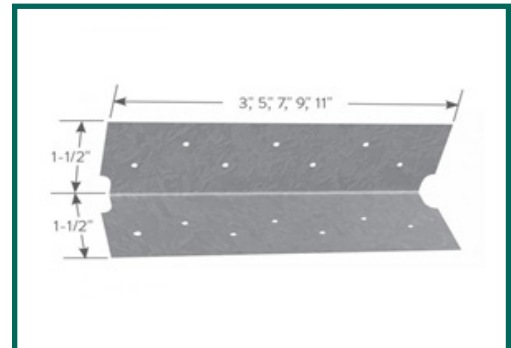

EasyClip™ S-Series™ Clip

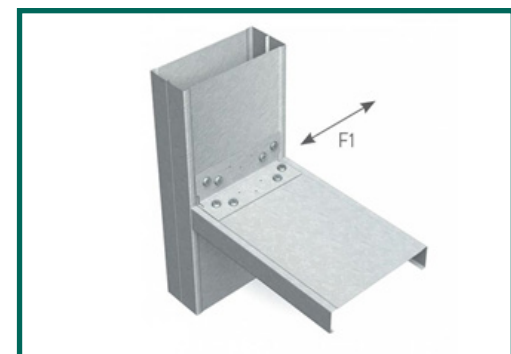

EasyClip™ S-Series Installation

PRODUCT DATA & ORDERING INFORMATION

Product code	Gauge	Mils	Design thickness (in)	Size (in)	Pcs./Bucket
CLIP-S543	16	54	0.0566	1-1/2 x 1-1/2 x 3	400
CLIP-S545	16	54	0.0566	1-1/2 x 1-1/2 x 5	200
CLIP-S547	16	54	0.0566	1-1/2 x 1-1/2 x 7	100
CLIP-S549	16	54	0.0566	1-1/2 x 1-1/2 x 9	100
CLIP-S685	14	68	0.0713	1-1/2 x 1-1/2 x 5	200
CLIP-S687	14	68	0.0713	1-1/2 x 1-1/2 x 7	100
CLIP-S689	14	68	0.0713	1-1/2 x 1-1/2 x 9	100
CLIP-S681	14	68	0.0713	1-1/2 x 1-1/2 x 11	100
CLIP-S973	12	97	0.1017	1-1/2 x 1-1/2 x 3	200

Material Structural Grade 50 Type H (ST50H), 50ksi

INSTALLATION

EasyClip S-Series support clips are attached to the cold-formed steel (CFS) framing members using #10 minimum self-drilling screws driven through the clip holes into the steel framing. When not filling all holes, install fasteners symmetrically starting at the top and bottom edges and move toward the center of the clip. Clips can also be welded to the CFS framing. Connections to the building frame can be made with powder-actuated fasteners, drill-in concrete anchors or welding. When using the tabular values for a welded clip, provide a full weld to the structure, top to bottom, along the outside of the clip. A 3/4" minimum weld on the outside edge of the 1-1/2" leg is also required to control warping or to hold the clip in place before final welding.

*EasyClip™ S-Series™ are distributed by Bailey Metal Products in Canada under permission granted by ClarkDietrich Building Systems. ClarkDietrich EasyClip™ S-Series™ is a trademark of ClarkDietrich.