


MONTREAL • TORONTO • CALGARY • EDMONTON • VANCOUVER






WALL ELEVATIONS


Bailey Wind Bearing Walls (BWB) Lightweight Steel Framing (LSF) provides economical structural support for finishes under lateral wind loads on buildings where other structural components carry axial loads. BWB walls can be designed for a variety of deflection limits for finishes such as EIFS, Stucco, Metal Panel and Brick Veneer. Wind-Bearing LSF may be used in buildings of any height.





EXTERIOR INFILL WALLS / CONTINUOUS EXTERIOR CURTAIN WALLS

Bailey Axial Loadbearing Walls (BAB) Lightweight Steel Framing (LSF) supports the combined axial and wind loads on interior and exterior walls. Buildings up to six stories in height can be framed using LSF. LSF works with a variety of floors including LSF Joists, ComSlab® composite flooring systems, OWSJ's and hollow precast concrete.




AXIAL LOAD BEARING WALLS



Bailey Joists for Floors & Roofs

Lightweight Steel Framing (LSF) Joists offer a wide range of span and load capabilities for commercial and residential floor systems and mezzanines. LSF ceiling Joist members can also be utilized for pitched, mansard and flat roofs. The use of Bailey LSF Joist members will provide support for interior drywall ceilings where long clear spans are required.




JOISTS FOR FLOORS & ROOFS

Bailey Non-Loadbearing Walls (BNLB) Lightweight Steel Framing (LSF) provides an effective solution for interior non-load bearing walls and partitions. When combined with top track deflection members, bulkheads will resist buckling caused by deflection of floor and roof assemblies. Non-load bearing LSF provides a stable framework for drywall or other finished wall surface applications.

TALL INTERIOR PARTITIONS

Bailey Spandrel Walls

Lightweight Steel Framing (LSF) accommodates a variety of spans for continuous strip window applications. LSF provides a stable, square platform in which glazing units and frames can be effectively installed.




SPANDREL WALLS FOR CONTINUOUS STRIP WINDOWS

The material presented in this document has been prepared for the general information of the reader. While the material is believed to be technically correct and in accordance with recognized good practice, it should not be used without first securing competent advice with respect to its suitability for any specific application. Bailey Metal Products Limited does not warrant or assume liability for the suitability of the material for any general or particular use.




WALL ELEVATIONS




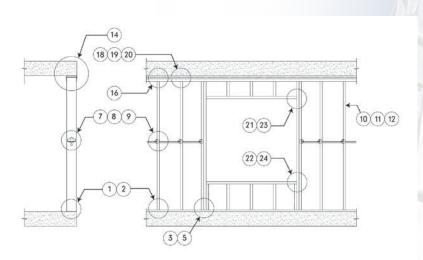


WIND LOADBEARING CONTINUOUS CURTAIN WALLS

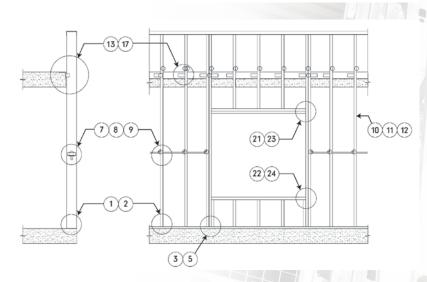

WIND LOADBEARING SPANDREL WALL FOR STRIP WINDOWS

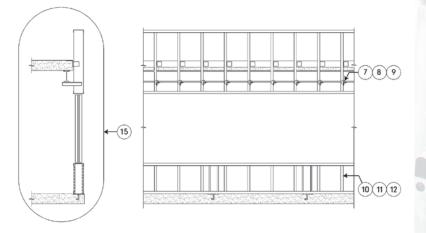


GENERAL DETAILS

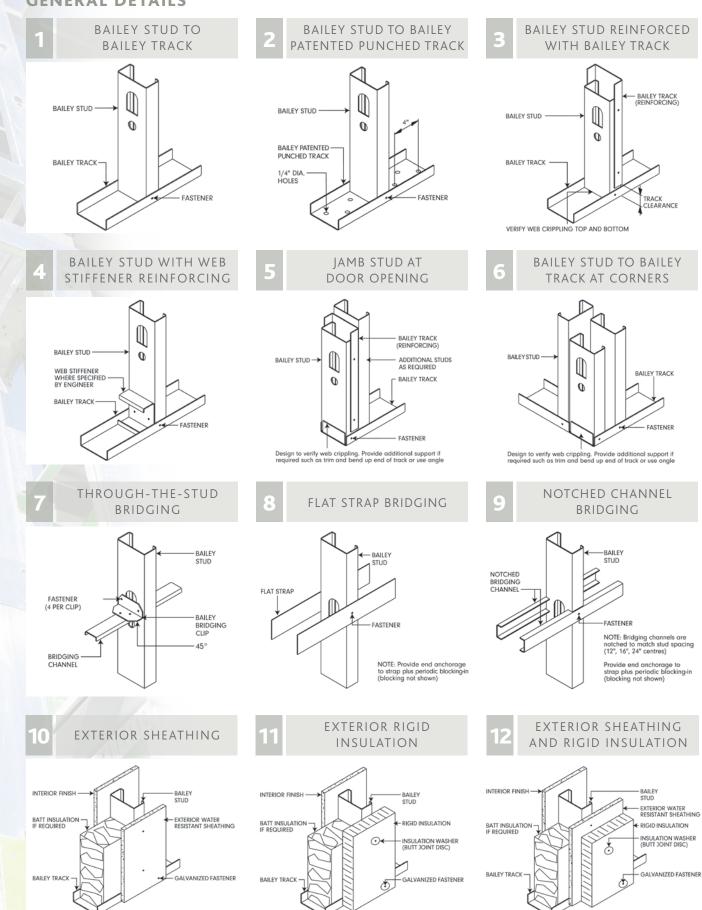



WIND BEARING WALLS

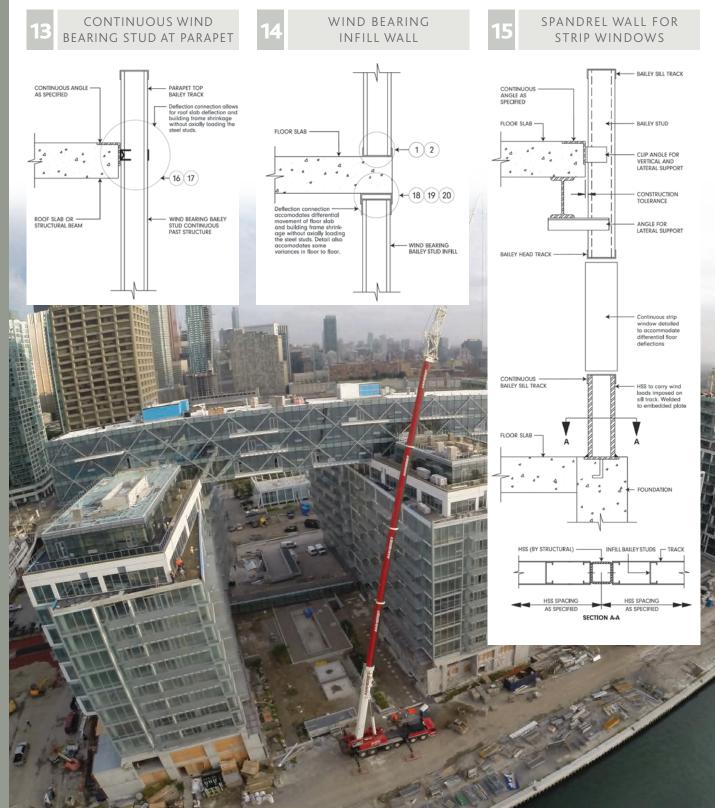


H

6 LIGHTWEIGHT STEEL FRAMING DETAILS - GENERAL & WIND BEARING



WIND BEARING WALLS – DEFLECTION DETAILS

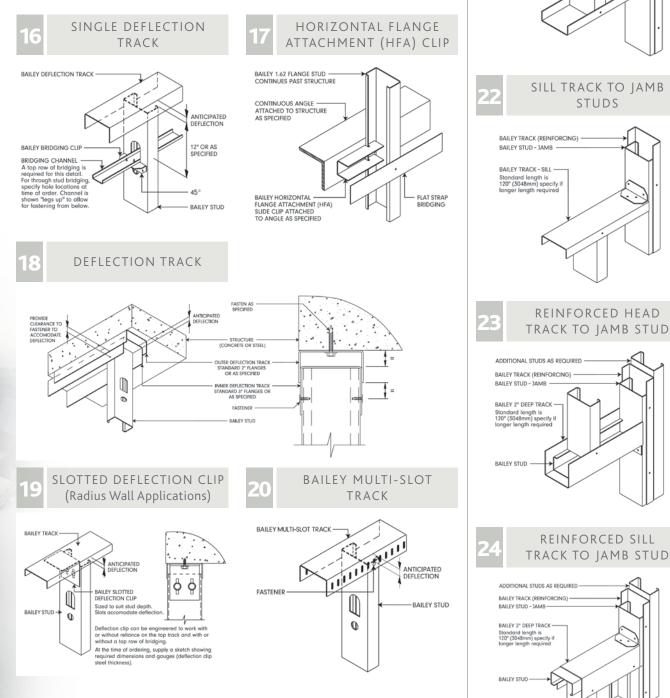

WIND BEARING WALLS – DETAILS AT OPENINGS

HEAD TRACK TO JAMB

STUDS

21

BAILEY TRACK (REINFORCING) BAILEY STUD - JAMB BAILEY TRACK - HEAD Standard length is 120" (3048mm) specify if longer length required









LIGHTWEIGHT STEEL FRAMING DETAILS GENERAL & WIND BEARING

sales@bmp-group.com • www.bmp-group.com



GWB07IN16-500

MONTREAL

525 Avenue Edward VII Dorval, QC H9P 1E7 Tel. (514) 735-3455 800-263-3455 Fax. (514) 735-5052

TORONTO

1 Caldari Road Concord, ON L4K 3Z9 Tel. (905) 738-9267 800-668-2154 Fax. (905) 738-5712

CALGARY

3924 27th Street NE Calgary, AB T1Y 5K7 Tel. (403) 248-3536 800-665-2013 Fax. (403) 248-0288

EDMONTON

Edmonton, AB T6B 3G7 Tel. (780) 462-5757 800-563-1751 Fax. (780) 450-3378

VANCOUVER

7715 Anvil Way Surrey, BC V3W 6A2 Tel. (604) 590-5100 800-818-2666 Fax. (604) 590-5105